


# OptimScan-5M Plus


High-Precision 3D Inspection system



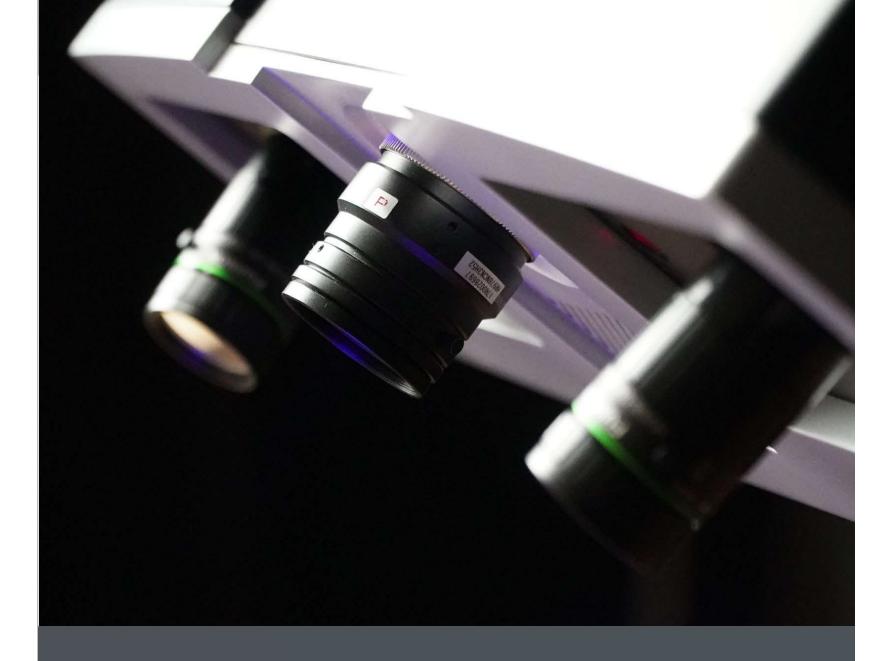

## OptimScan-5M Plus

OptimScan-5M Plus is High-Precision 3D Inspection scanner with narrow-band blue light source and upgraded high-resolution industrial lens, it provides better detail performance in scanning and smoother data quality. Three sets of high-resolution industrial lenses are used according to different size object, making it more flexible and adaptable. It is widely applied in reverse engineering, quality inspection and quality control.

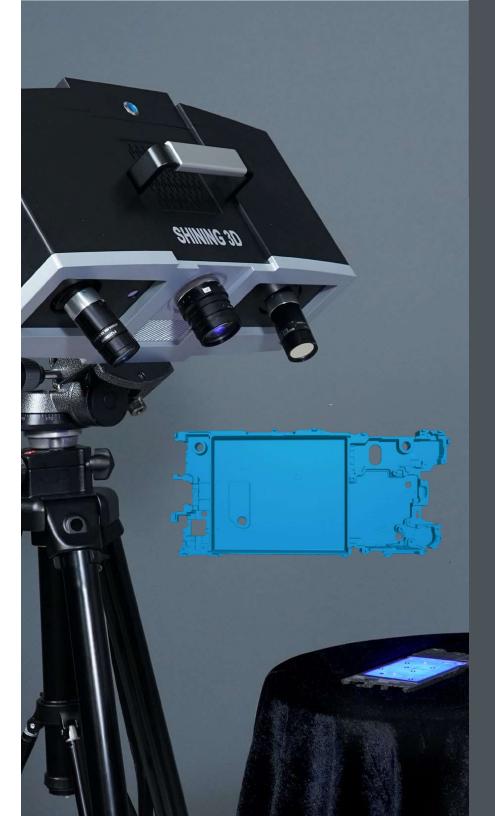

### **Product features**



#### **High Resolution**

Three sets of 5 megapixel high resolution cameras and 1080P projection were used to obtain high precision features.



#### High Accuracy

Single shot accuracy can reach up to 0.005mm, scanner provides the function of environmental vibration detection and effectively ensure high quality data and precision.



#### Multiple Scan Range

The system realizes different scanning range by switching off different lenses to ensure a finer scanning performance.



#### **HDR Function**

The HDR function helps to scan high contrasted objects like black and white objects to get complete data.

### **Data Presentation**



## One-click Integration Module Function


The system integrates the "one-click" automatic markers alignment module and the GREC global deviation control module, which effectively reduces alignment errors and get high-quality data with high precision.




## Compatible with Mainstream Software

Support Multiple data formats Support mainstream reverse design or 3D inspection software



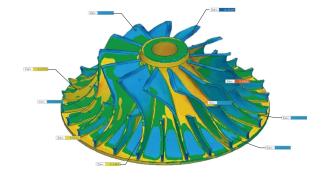



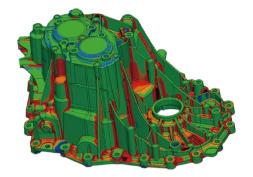


## Workflow with third-party softwares

#### 3D inspection process









#### Import Data

Support a variety of data model formats, compatible with data captured by various mainstream scanner and CAD digital data of various mainstream design software.



#### **Alignment Compare**

The RPS reference positioning system and the reference alignment function achieve high-precision automatic alignment. It can effectively ensure the accuracy of deviation analysis. Multiple deviation analysis functions can be used to meet the different needs.



#### Measurement Evaluation

it supports dimensions of ASMEY14.5GD&T tolerance and geometric. The software can also automatically calculate the deviation between reference and actual value, and get the accurate calculation result.



#### **Generate Report**

Automatically generate inspection reports based on predefined templates. Analysis images and calculation results can be quickly exported. it improves inspection efficiency

#### Reverse engineering process



#### **Data Processing**

Data processing method like align, optimize, merge, holes fill, simplify, and smooth can obtain high-quality triangular mesh models.



#### **Feature Extraction**

Automatically classify the mesh into different colored geometric regions based on curvature and features of the scan data, extract design parameters, and automatically create sketch profiles.





#### **Exact Fit**

Mesh-based fitting algorithms create NURBUS surfaces, easily and quickly creating 3D free-form bodies from free-form shapes of meshes.



#### CAD Conversion

Create CAD features, hybrid solid and surface models from scan data, it covers different objects to ensure model accuracy.

## Technical specifications

| Product type                       | 5M P <b>l</b> us-400   | 5M Plus-200  | 5M Plus-100    |  |
|------------------------------------|--|--|----------------|--|
| Sing <b>l</b> e scan range         | 400 mm x 300 mm  | 200 mm x 150 mm  | 100 mm x 75 mm |  |
| single shot accuracy               | 0.015 mm   | 0.01 mm  | 0.005 mm       |  |
| Point distance                     | 0.16 mm  | 0.08 mm  | 0.04 mm        |  |
| Working distance                   | 560 mm   |  |                |  |
| Camera Resolution                  | 5.0 MPx2   |  |                |  |
| Light source                       | Blue light ( LED )   |  |                |  |
| Scan speed                         | ≤1.5 s   |  |                |  |
| Scan method                        | non-contact structure light scanning                                 |  |                |  |
| Output Data Format                 | .asc、.stl、.obj、 etc., and compatible with the mainstream 3D software |  |                |  |
| Working temperature                | 0° C~40° C   |  |                |  |
| Working humidity                   | 10% RH ~ 90% RH  |  |                |  |
| Scanner weight                     | 6.8 kg   |  |                |  |
| Size                               | 435 mm x 300 mm x 200 mm   |  |                |  |
| Recommended computer configuration |  | Graphics card: NVIDIA GTX 1080 or above; Video memory: ≥4 G; Processor: above i7 8700; Memory: ≥32 GB; Port: USB 3.0 |                |  |

<sup>\*</sup>Also compatible with all major metrology, CAD, and computer graphic software through mesh and point cloud impor

